

A100-4


ELECTRO-HYDRAULIC OPERATING TABLE

Registration code: SKL-A



A100-4

FEATURES AND HIGHLIGHTS

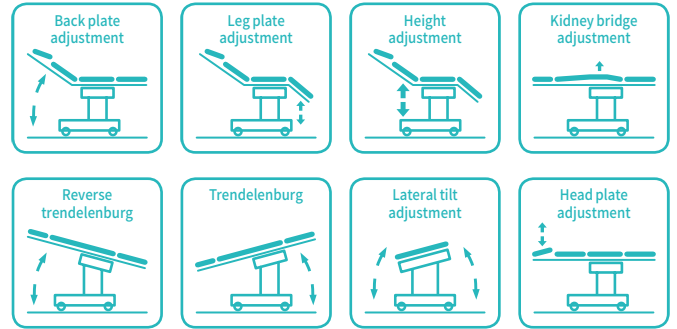

Technical parameters

External Size (LxWxH)	2100x500x800-1000 mm
Built-in Kidney Bridge	0-110 mm
Back Plate Up/Down	75°/20°
Head Plate Up/Down	45°/90°
Leg Plate Up/Down	15°/90°
Trendelenburg/Reverse Trendelenburg	22°/25°
Lateral Tilt Left/Right	20°/20°
Horizontal Sliding	300 mm

Technical configuration

<input checked="" type="checkbox"/> Bed Frame	1pc
<input checked="" type="checkbox"/> Anesthesia Screen Frame	1pc
<input checked="" type="checkbox"/> Mattress	1set
<input checked="" type="checkbox"/> Kidney Bridge Handle	1pc
<input checked="" type="checkbox"/> Arm Support with Cushion	2pcs
<input checked="" type="checkbox"/> Leg Support with Cushion	2pcs
<input checked="" type="checkbox"/> Shoulder Support with Cushion	2pcs
<input checked="" type="checkbox"/> Body Support with Cushion	2pcs
<input checked="" type="checkbox"/> Foot Support with Cushion	2pcs

Remote Panel

All function controlled by hand controller, and can be locked.



C-arm

Extra-long horizontal sliding, available for c-arm operation.




Kidney Bridge

Built-in kidney bridge, more convenient and nice appearance.



Wash Basin Hole

Five section table top including Head, Back, Shoulder, Hip and Leg, all section applicable for X ray use and under each section with X ray cassette layer.



Head Plate

Detachable double head plate and leg plate meet operation position needs and use Germany cylinder assist system.



Powder Supply

Internal battery maintaining power supply for 50-80 operations and with low battery warning function.



Shoulder Support with Cushion



Body Support with Cushion



Arm Support with Cushion



Leg Support with Cushion



Lowest Position of Table Top
800mm



Highest Position of Table Top
1000mm



Longitudinal Adjustment
0-300mm



Longitudinal Adjustment
0-300mm



Reversed Trendelenburg
0°-22°



Trendelenburg
0°-25°



Lateral Tilt Left
0°-20°



Lateral Tilt Right
0°-20°



Kidney Bridge Elevation
110mm



Anorectum Operation
Position



E.N.T Operation Position



(Optional) Head Rest



(Optional) Lateral Arm
Support



(Optional) Waste Basin For
Gynecology



(Optional) Orthopedics Traction Frame





A100-4A

ELECTIC OPERATING TABLE

Registration code: SKL-A




SKSurgitech[™]
by Saikang Medical

Care you precisely

A100-4A

FEATURES AND HIGHLIGHTS

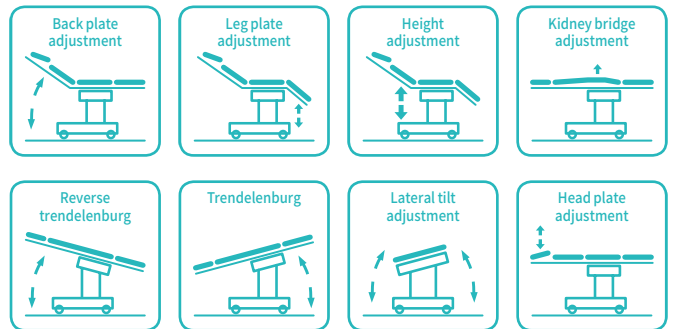

Technical parameters

External Size (LxWxH)	2060x500x710-1010 mm
Built-in Kidney Bridge	0-110 mm
Back Plate Up/Down	80°/20°
Head Plate Up/Down	40°/90°
Leg Plate Up/Down	15°/90°
Trendelenburg/Reverse Trendelenburg	25°/25°
Lateral Tilt Left/Right	15°/15°
Horizontal Sliding	350 mm
Battery Standby Time	80 h
Power Supply	220V 50HZ 350VA
Power Control Circuit	12V
Plug	as required

Technical configuration

<input checked="" type="checkbox"/> Bed Frame	1pc
<input checked="" type="checkbox"/> Anesthesia Screen Frame	1pc
<input checked="" type="checkbox"/> Mattress	1set
<input checked="" type="checkbox"/> Kidney Bridge Handle	1pc
<input checked="" type="checkbox"/> Arm Support with Cushion	2pcs
<input checked="" type="checkbox"/> Leg Support with Cushion	2pcs
<input checked="" type="checkbox"/> Shoulder Support with Cushion	2pcs
<input checked="" type="checkbox"/> Body Support with Cushion	2pcs
<input checked="" type="checkbox"/> Foot Support with Cushion	2pcs
<input checked="" type="checkbox"/> Hand Controller	1pc

Remote Panel & Column Panel

Leg Plate With Imported Gas Spring For Easy Control.



Material

The base seat and upright column covering are made of high quality 304 stainless steel, which is anti-corrosive and can be easily cleaned.



Kidney Bridge

Built-in kidney bridge, more convenient and nice appearance.



Braking System

Pedal Brake, Easy To Move And Lock.



Wheel

6" castors import from germany.



Powder Supply

Internal battery maintaining power supply for 50-80 operations and with low battery warning function.



Hydraulic System

Brand hydraulic system (German Hoerbiger) make table with low noise, high safety and reliability.



Leg Plate

Leg Plate With Imported Gas Spring For Easy Control.



Shoulder Support with Cushion



Body Support with Cushion



Arm Support with Cushion



Leg Support with Cushion



Anesthesia Screen Frame



Lowest Position of Table Top
710mm



Highest Position of Table Top
1010mm




Back Plate Up
0°-80°



Back Plate Down
0°-20°



Reversed Trendelenburg
0°-25°



Trendelenburg
0°-25°



Lateral Tilt Left
0°-15°



Lateral Tilt Right
0°-15°



Horizontal Sliding
350mm



Head Plate Up
0°-40°



Head Plate Down
0°-90°



Leg Plate Rest
-90°~15°





A106-2

ELECTRO-HYDRAULIC OPERATING TABLE

Registration code: SKL-A



SKSurgitech[™]
by Saikang Medical

Care you precisely

A106-2

FEATURES AND HIGHLIGHTS


Technical parameters

▪ External Length	2080mm
▪ External Width	550mm
▪ Table Height Min.	500mm
▪ Table Height Max.	800mm
▪ Reverse Trendelenburg	0°-25°
▪ Trendelenburg	0°-25°
▪ Lateral Tilt Left/Right	0°-20°/0°-20°
▪ Head Plate Up/Down	0°-45°/0°-90°

▪ Back Plate Up/Down	0°-80°/0°-20°
▪ Foot Plate Up/Down	0°-15°/0°-90°
▪ Foot Plate Horizontal Positioning	0°-90°
▪ Patient Weight Capacity	250kg

Technical configuration

<input checked="" type="checkbox"/> Anaesthesia Screen	1pc
<input checked="" type="checkbox"/> Hand Remote	1pc
<input checked="" type="checkbox"/> Kidney Bridge Handle	1pc
<input checked="" type="checkbox"/> Arm Support	1pc
<input checked="" type="checkbox"/> Foot Support	1pc
<input checked="" type="checkbox"/> Mattress	1set
<input checked="" type="checkbox"/> Shoulder Support	1pair
<input checked="" type="checkbox"/> Long Fixing Clamp	1pair
<input checked="" type="checkbox"/> Fixing Clamp	7pcs
<input checked="" type="checkbox"/> Power Line	1pc



Material

The base, column and side hoder are all made of high quality 304 stainless steel, which is anti-corrosive and can be easily cleaned.



Powder Supply

Internal battery maintaining power supply for 50-80 operations and with low battery warning function.




Remote Panel

All function controlled by hand controller in the column, and can be locked.




Hydraulic System

Brand hydraulic system (German Hoerbiger) make table with low noise, high safety and reliability.




Control System

Foot treadle brake device which is easily for moving operating table.



Super Low Position

Super low position (500mm) , suitable for operation on head.



Kidney Bridge

Built-In Kidney Bridge, More Convenient And Nice Appearance.



Screen



Armrest



Knee Curtch



Shoulder Support



Body Support





A200

ELECTRIC OPERATING TABLE

Registration code: SKL-A



SKSurgitech[™]
by Saikang Medical

Care you precisely

A200

FEATURES AND HIGHLIGHTS



Technical parameters


External size (LxWxH):	2000x500x(660-960)mm
Reverse trendelenburg:	0-22°
Trendelenburg:	0-30°
Lateral tilt left/right:	0-20°
Head plate up/down:	50°/90°
Back plate up/down:	70°/15°
Leg plate down:	0-90°
Leg plate outwards:	0-90°
Kidney bridge elevation:	0-120mm
Horizontal sliding:	0-300mm
Safe working load:	250kg

Technical configuration

<input checked="" type="checkbox"/> Arm support	2 pcs
<input checked="" type="checkbox"/> Leg support	2 pcs
<input checked="" type="checkbox"/> Body Support	2 pcs
<input checked="" type="checkbox"/> Shoulder Support	2 pcs
<input checked="" type="checkbox"/> Slider	12 pcs
<input checked="" type="checkbox"/> Tightener	2 pcs
<input checked="" type="checkbox"/> Anaesthetic Screen	1 pc
<input checked="" type="checkbox"/> Hand controller	1 pc
<input checked="" type="checkbox"/> Handwheel	1pc

Material

The chassis cover is made of 1.6mm high quality 304 stainless steel, which is welded by the robot seamlessly. The shape is beautiful, stable and firm.




Mattress

Removable memory mattress, made of high density sponge, good resilience, anti-static, anti-bedsores, anti-bacterial and anti-impact.



Control System

Electric control the height lifting, trendelenburg and reverse trendelenburg, tilt, back plate folding up and down, easy and convenient operation.



Braking system

Mechanical brake device at the side of the base, with fixed or moving function, flexible and reliable.



Hand controller

All functions are controlled by the hand controller.



Kidney bridge

With kidney bridge, the lifting range is up to 120mm.



Battery could support

Battery could support about 50-80 complete operation cycles. Working time could be last for one week according to useage and help to keep the operating table running in the event of power failure.



Horizontal movement

300mm horizontal movement function, with high strength phenolic resin table top, could be used for X-ray and C-arm.




Leg plate

The leg plate is controlled by the air spring, which makes the operation more effortless and smooth.



Foot plate

Standard foot plate could be used to lengthen the operating table, also could be used as a kneeling plate.



Armrest



Anesthesia Frame



Leg Crutches



Shoulder Support



Body Supporter



Professional functions

Lowest position of table top

660mm



Highest position of table top

960mm



Back plate up/down

-15°-70°



Horizontal movement

0-300mm



Reversed trendelenburg

0°-22°



Trendelenburg

0°-30°



Right lateral tilt

0°-20°



Left lateral tilt

0°-20°



Head plate upward

0°-55°



Head plate downward

0°-90°



Leg section evagination

0°-90°



Leg plate down

0°-90°



Kidney bridge elevation

0-120mm





A2000

ELECTRIC OPERATING TABLE

Registration code: SKL-A



SKSurgitechTM
by Saikang Medical

Care you precisely

A2000

FEATURES AND HIGHLIGHTS



Technical parameters


External size (LxWxH):	2100x480x(680-930)mm
Reverse trendelenburg:	0-25°
Trendelenburg:	0-25°
Lateral tilt left/right:	0-15°
Head plate up/down:	45°/90°
Back plate up/down:	70°/15°
Leg plate up/down:	45°/90°
Leg plate outwards:	0-90°
Kidney bridge elevation:	0-100mm
Horizontal sliding:	0-350mm
Safe working load:	150kg

Technical configuration

<input checked="" type="checkbox"/> Bed frame	1 pc
<input checked="" type="checkbox"/> Mattress	1 set
<input checked="" type="checkbox"/> Anesthesia screen frame	1 pc
<input checked="" type="checkbox"/> Shoulder holder	2 pcs
<input checked="" type="checkbox"/> Arm holder	2 pcs
<input checked="" type="checkbox"/> Leg support	2 pcs
<input checked="" type="checkbox"/> Foot support	2 pcs
<input checked="" type="checkbox"/> Hand controller	1 pc
<input checked="" type="checkbox"/> Sliding block	10 pcs
<input checked="" type="checkbox"/> Spanner	4 pcs

Material

The base material for the table is high thickness 304 stainless steel, seamless welding by robot, with modern appearance and more stable.



Mattress

Removable memory mattress, good rebound resilience, anti-static electricity and anti-microbial.



Brake

Pedal brake, easy to move and lock.



Safety

The table is provided with an emergency stop switch on the base column, help to stop the operating table running in case of emergency situation, ensure the safety of operation.



Leg plate

Leg plate with imported gas spring for easy control.



Kidney bridge

Manual kidney bridge, more convenience.



Battery could support

Battery could support about 50-80 complete operation cycles. Working time could be last for one week according to useage and help to keep the operating table running in the event of power failure.



Armrest



Anesthesia Frame



Leg Crutches



Shoulder Support



Body Supporter



Professional functions

Lowest position of table top

680mm



Highest position of table top

930mm



Back plate up

0°-70°



Back plate down

0°-15°



Reversed trendelenburg

0°-25°



Trendelenburg

0°-25°



Right lateral tilt

0°-15°



Left lateral tilt

0°-15°



Head plate upward

0°-45°



Head plate downward

0°-90°



Leg section evagination

0°-90°



Leg plate up/down

-45°-90°



Kidney bridge elevation

0-100mm





A202

ELECTRIC
OPERATING TABLE

Registration code: SKL-A




SKSurgitech™
by Saikang Medical

Care you precisely

A202

FEATURES AND HIGHLIGHTS

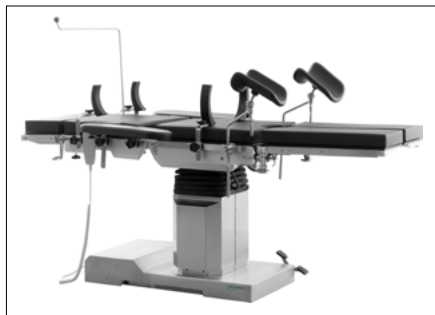

Technical parameters


External size (LxWxH):	2000x500x(750-1050)mm
Reverse trendelenburg:	0-22°
Trendelenburg:	0-25°
Lateral tilt left/right:	0-20°
Head plate up/down:	45°/90°
Back plate up/down:	70°/35°
Leg plate down:	0-90°
Leg plate outwards:	0-90°
Kidney bridge elevation:	0-80mm
Horizontal sliding:	0-300mm
Safe working load:	360kg

Technical configuration

<input checked="" type="checkbox"/> Arm support	2 pcs
<input checked="" type="checkbox"/> Leg support	2 pcs
<input checked="" type="checkbox"/> Body Support	2 pcs
<input checked="" type="checkbox"/> Shoulder Support	2 pcs
<input checked="" type="checkbox"/> Slider	7 pcs
<input checked="" type="checkbox"/> Tightener	2 pcs
<input checked="" type="checkbox"/> Anaesthetic Screen	1 pc
<input checked="" type="checkbox"/> Hand controller	1 pc
<input checked="" type="checkbox"/> Handwheel	1pc


Material

The chassis cover is made of high quality Ni-Cr stainless alloy steel by seamless robot welding, corrosion resistance, disinfection resistance, rust-proof and durable.



Mattress

Removable memory mattress, good rebound resilience, anti-static electricity and anti-microbial.



Control System

Electric-hydraulic control system, non-gear structure, all functions are controlled by the hand controller.



Braking system

Mechanical brake device at the side of the base, with fixed or moving function, flexible and reliable.



Hand controller

All functions are controlled by the hand controller.



Kidney bridge

Kidney bridge is adjusted by the hand wheel at the side of head board, more convenient, with separate mattress.



Battery could support

Battery could support about 50-80 complete operation cycles. Working time could be last for one week according to useage and help to keep the operating table running in the event of power failure.



Horizontal movement

300mm horizontal movement function, with high strength phenolic resin table top, could be used for X-ray and C-arm.



Leg plate


The up and down folding of the leg plate is manually controlled by the high strength gear, which makes the operation more effort-saving and smooth.



Armrest



Anesthesia Frame



Leg Crutches



Shoulder Support



Body Supporter



Professional functions

Lowest position of table top
750mm



Highest position of table top
1050mm



Back plate up
0°-70°



Back plate down
0°-35°



Reversed trendelenburg
0°-22°



Trendelenburg
0°-25°




Right lateral tilt
0°-20°



Left lateral tilt
0°-20°



Head plate upward
0°-45°



Head plate downward
0°-90°



Leg section evagination
0°-90°



Leg plate up/down
-45°-90°



Kidney bridge elevation
0-80mm



Horizontal movement
0-300mm





A205

MANUAL OPERATING TABLE

Registration code: SKL-A



SKSurgitech[™]
by Saikang Medical

Care you precisely

A205

FEATURES AND HIGHLIGHTS





Technical parameters

▪ External size (LxWxH):	2000x480x(700-960)mm
▪ Head plate up/down:	45°/90°
▪ Back plate up:	0-80°
▪ Leg plate down:	0-90°
▪ Safe working load:	150kg

Technical configuration

<input checked="" type="checkbox"/> Arm support	2 pcs
<input checked="" type="checkbox"/> Leg support	2 pcs
<input checked="" type="checkbox"/> Body Support	2 pcs
<input checked="" type="checkbox"/> Shoulder Support	2 pcs
<input checked="" type="checkbox"/> Anaesthetic Screen	1 pc

Professional functions




Material

Base structure is made of high-quality 304 stainless steel, robot welded with high strength and modern appearance. Table top is made of steel through epoxy painting, ASTM testing anti-bacterial.



Mattress

Removable memory mattress. Good resilience, anti-static, antibacterial, impact resistant.



Control System

All the functions are manual controlled by screw and rack.




Structure

Full mechanical structure. Simple maintenance, low failure rate.



Leg board

Leg board can be folded down by adjusting the small handle. Leg board down: max. to 90°.



Armrest



Anesthesia Frame



Leg Crutches



Shoulder Support



Body Supporter






A3001A

MANUAL OPERATING TABLE

Registration code: SKT-C

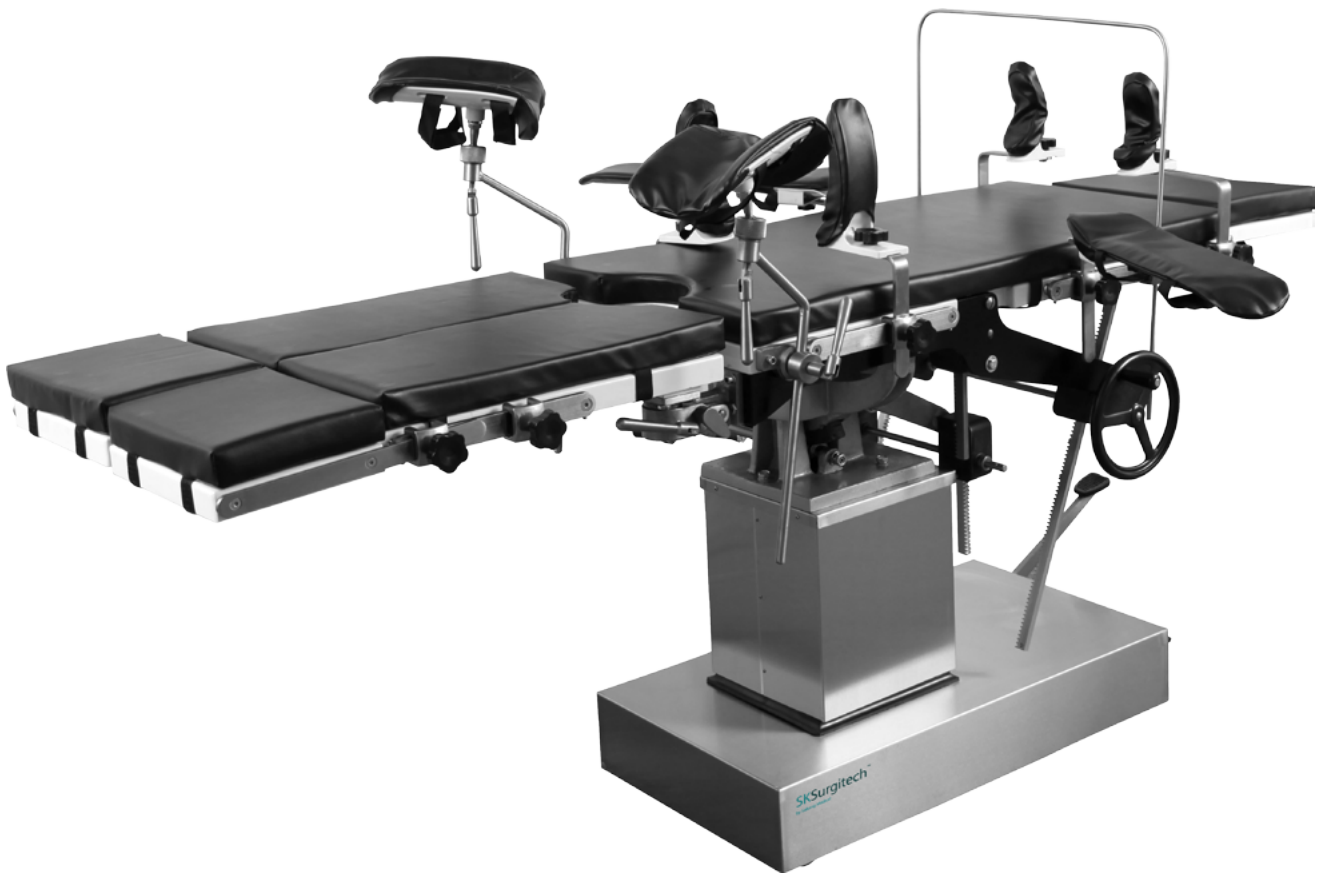


SKSurgitech[™]
by Saikang Medical

Care you precisely

A3001A

FEATURES AND HIGHLIGHTS

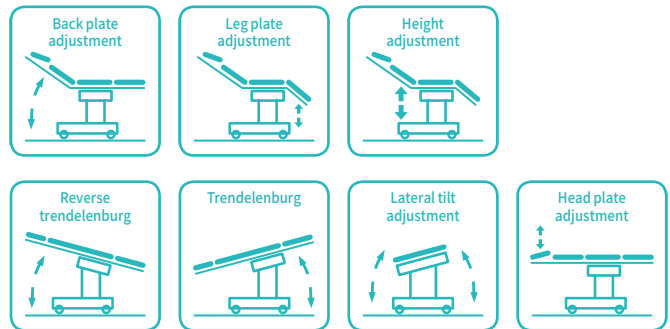

Technical parameters


External Size (LxWxH)	2000x480x800-1050 mm
Back Plate Up/Down	80°/18°
Head Plate Up/Down	45°/90°
Leg Plate Down	90°
Leg board Outwards	90°
Trendelenburg/Reverse Trendelenburg	20°/30°
Lateral Tilt Left/Right	18°/18°
Patient Weight Capacity	185kg

Technical configuration

<input checked="" type="checkbox"/> Bed Frame	1pc
<input checked="" type="checkbox"/> Anesthesia Screen Frame	1pc
<input checked="" type="checkbox"/> Mattress	1set
<input checked="" type="checkbox"/> Arm Support with Cushion	2pcs
<input checked="" type="checkbox"/> Leg Support with Cushion	2pcs
<input checked="" type="checkbox"/> Shoulder Support with Cushion	2pcs
<input checked="" type="checkbox"/> Body Support with Cushion	2pcs
<input checked="" type="checkbox"/> Foot Support with Cushion	2pcs
<input checked="" type="checkbox"/> Oil Pot (With Oil)	1pc

Material

The base seat and upright column covering are made of high quality 304 stainless steel, which is anti-corrosive and can be easily cleaned.




Braking System

Foot treadle brake device which is easily for moving operating table.



Control System

Various actions are controlled by hydraulic pneumatic system and mechanical driven system, all the adjustments of the table are performed on both sides of the table.



Height Adjustment

Foot step hydraulic elevating, Imported Y type sealing ring and is durable.



Mattress

The mattress is wrapped with imported artificial leather. High-density memory sponge is formed in one piece, with no seam.



Special Leg Plate Operations

The legs folded plates are used servo-assisted gas spring, handle operation, light and flexible; leg plate could be outreach and fold down, convenient for urology and anorectal surgery.



Shoulder Support with Cushion



Body Support with Cushion



Arm Support with Cushion



Leg Support with Cushion



Anesthesia Screen Frame



Back Plate Up
0°-80°



Back Plate Down
0°-18°



Head Plate Up
0°-45°



Head Plate Down
0°-90°



Reversed Trendelenburg
0°-30°



Trendelenburg
0°-20°



Lateral Tilt Left
0°-18°



Lateral Tilt Right
0°-18°



Height Adjustment
800-1050_{mm}



Leg Plate Down
90°



Leg Board Outwards
90°





A3008A-1

MANUAL OPERATING TABLE

Registration code: SKT-C




SKSurgitech[™]
by Saikang Medical

Care you precisely

A3008A-1

FEATURES AND HIGHLIGHTS

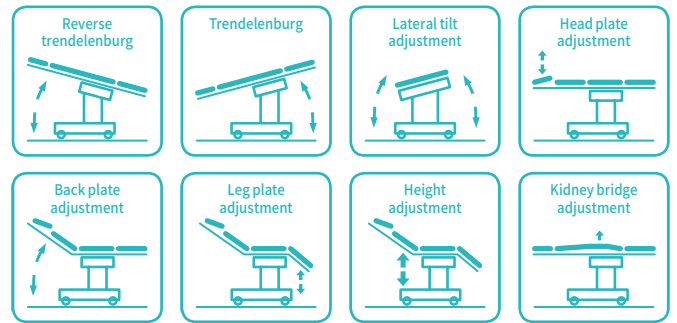

Technical parameters

▪ External Size (LxWxH)	2100x480x750-950 mm
▪ Built-in Kidney Bridge	0-100 mm
▪ Back Plate Up/Down	75°/5°
▪ Head Plate Up/Down	30°/90°
▪ Trendelenburg/Reverse Trendelenburg	30°/30°
▪ Lateral Tilt Left/Right	20°/20°
▪ Leg Plate Down	90°
▪ Patient Weight Capacity	250 kg

Technical configuration

<input checked="" type="checkbox"/> Anesthesia Screen Frame	1pc
<input checked="" type="checkbox"/> Mattress	1set
<input checked="" type="checkbox"/> Kidney Bridge Handle	1pc
<input checked="" type="checkbox"/> Arm Support with Cushion	2pcs
<input checked="" type="checkbox"/> Leg Support with Cushion	2pcs
<input checked="" type="checkbox"/> Shoulder Support with Cushion	2pcs
<input checked="" type="checkbox"/> Body Support with Cushion	2pcs
<input checked="" type="checkbox"/> Long Fixing Clamp	1pair
<input checked="" type="checkbox"/> Fixing Clamp	8pcs




Application

This operating table is a comprehensive multi-function type, suitable for medical units to perform various operations, all movements are controlled by the manual cranks.



Material

The base, column and side hoder are all made of high quality 304 stainless steel, which is anti-corrosive and can be easily cleaned.



Control System

Foot treadle brake device which is easily for moving operating table.



Built-In Kidney Bridge

Built-In kidney bridge, more convenient and nice appearance.




Hydraulic

The height adjustment controlled by hydraulic pump.



Mattress


PU cover, custom mattress, easy disassembly and cleaning, thickness of mattress: 6cm



Shoulder Support with Cushion




Anesthesia Screen Frame



Arm Support with Cushion



Leg Support with Cushion



Body Support with Cushion





A301

ELECTRIC OPERATING TABLE

Registration code: SKL-A




SKSurgitech[™]
by Saikang Medical

Care you precisely

A301

FEATURES AND HIGHLIGHTS

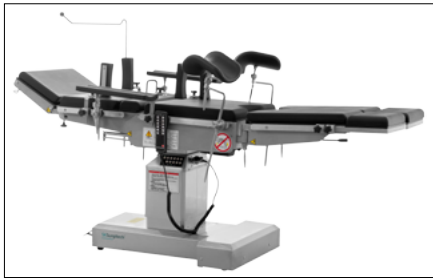

Technical parameters


External size (LxWxH):	2150x555x(750-1000)mm
Reverse trendelenburg:	0-25°
Trendelenburg:	0-25°
Lateral tilt left/right:	0-15°
Head plate up/down:	30°/90°
Back plate up/down:	70°/15°
Leg plate down:	90°
Leg plate outwards:	90°
Kidney bridge elevation:	0-110mm
Horizontal sliding:	0-350mm
Safe working load:	275kg

Technical configuration

<input checked="" type="checkbox"/> Bed frame	1pc
<input checked="" type="checkbox"/> Mattress	1set
<input checked="" type="checkbox"/> Anesthesia screen frame	1pc
<input checked="" type="checkbox"/> Shoulder holder	2pcs
<input checked="" type="checkbox"/> Arm holder	2pcs
<input checked="" type="checkbox"/> Leg support	2pcs
<input checked="" type="checkbox"/> Foot support	2pcs
<input checked="" type="checkbox"/> Hand controller	1pc
<input checked="" type="checkbox"/> Sliding block	8pcs
<input checked="" type="checkbox"/> Spanner	5pcs

Material

The base material for the table is high thickness 304 stainless steel, seamless welding by robot, with modern appearance and more stable.




Mattress

Polyurethane foam mattress, waterproof and seamless, avoid liquid in. The connection between table and mattress is buckle joint, easy to disassemble and install, easy to clean.



Head plate

Head plate is with imported gas spring for easy control.



Kidney bridge

Manual kidney bridge, operate by head side rocker, more convenience.



Horizontal sliding

Extra horizontal sliding, distance 350mm high strengthen phenolic resin table surface, C-arm and X-ray compatible.



Dual control system

All functions controlled by both hand controller or control panel on table base column. With action LCD display on hand controller, easy to operate. With control panel on table base column, in case of emergency hand controller failure.




Leg plate

Leg plate with imported gas spring for easy control. Disassembled type leg plate.



Brake

Pedal brake, easy to move and lock. Pedal down to release the inner castors down. Pedal up to retract the castors, which enables the table locked on the floor.



Battery could support

Battery could support about 80-120 complete operation cycles. Working time could be last for one week according to useage and help to keep the operating table running in the event of power failure.



Armrest




Anesthesia Frame



Leg Crutches



Shoulder Support



Body Supporter



Professional functions

Lowest position of table top
750mm



Highest position of table top
1000mm



Back plate up/down
-15°-70°



Kidney bridge elevation
0-110mm



Reversed trendelenburg
0°-25°



Trendelenburg
0°-25°



Right lateral tilt
0°-15°



Left lateral tilt
0°-15°



Head plate upward
0°-30°



Head plate downward
0°-90°



Leg section evagination
0°-90°



Leg plate down
0°-90°





A302

ELECTRIC
OPERATING TABLE


Registration code: SKL-A

SKSurgitechTM
by Saikang Medical

Care you precisely

A302

FEATURES AND HIGHLIGHTS

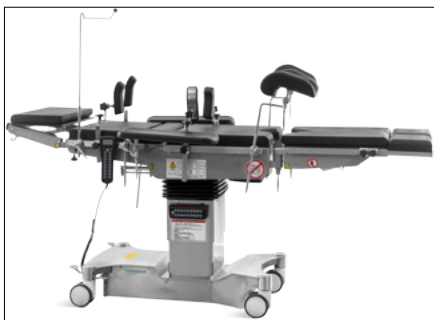

Technical parameters

External size (LxWxH):	2150x555x(700-1000)mm
Reverse trendelenburg:	0-25°
Trendelenburg:	0-25°
Lateral tilt left/right:	0-25°
Head plate up/down:	45°/90°
Head plate Height adjustment:	70mm
Back plate up/down:	70°/22°
Leg plate up/down:	15°/90°
Leg plate outwards:	90°
Kidney bridge elevation:	0-110mm
Horizontal sliding:	0-350mm
Safe working load:	275kg

Technical configuration

<input checked="" type="checkbox"/> Bed frame	1pc
<input checked="" type="checkbox"/> Mattress	1set
<input checked="" type="checkbox"/> Anesthesia screen frame	1pc
<input checked="" type="checkbox"/> Shoulder holder	2pcs
<input checked="" type="checkbox"/> Arm holder	2pcs
<input checked="" type="checkbox"/> Leg support	2pcs
<input checked="" type="checkbox"/> Foot support	2pcs
<input checked="" type="checkbox"/> Hand controller	1pc
<input checked="" type="checkbox"/> Sliding block	8pcs
<input checked="" type="checkbox"/> Spanner	5pcs

Material

The base material for the table is high thickness 304 stainless steel, seamless welding by robot, with modern appearance and more stable.




Mattress

Polyurethane foam mattress, waterproof and seamless, avoid liquid in. The connection between table and mattress is buckle joint, easy to disassemble and install, easy to clean.



Head plate

Head plate is with imported gas spring for easy control.



Kidney bridge

Manual kidney bridge, operate by head side rocker, more convenience.



Horizontal sliding

Extra horizontal sliding, distance 350mm high strengthen phenolic resin table surface, C-arm and X-ray compatible.



Dual control system

All functions controlled by both hand controller or control panel on table base column. With action LCD display on hand controller, easy to operate. With control panel on table base column, in case of emergency hand controller failure.




Leg plate

The up and down folding actions of the leg plate are all completed by electric. The leg plate is removable, effortless and smooth.



Castors

HAION brand castors, each load bearing is 250kg, smooth and noiseless movement, with longer service life. Pedal brake, easy to move and lock. Unique switch design.



Battery could support


Battery could support about 80-120 complete operation cycles. Working time could be last for one week according to useage and help to keep the operating table running in the event of power failure.



Armrest




Anesthesia Frame



Leg Crutches



Shoulder Support



Body Supporter



Professional functions

Lowest position of table top

700mm



Highest position of table top

1000mm



Back plate up

0°-70°



Back plate down

0°-22°



Reversed trendelenburg

0°-25°



Trendelenburg

0°-25°



Right lateral tilt

0°-25°



Left lateral tilt

0°-25°



Head plate upward

0°-45°



Head plate downward

0°-90°



Leg section evagination

0°-90°



Leg plate up/down

-15°-90°



Head plate Height adjustment

0-70mm



Kidney bridge elevation

0-110mm



Horizontal sliding

0-350mm





CONSTANT INNOVATION



Design



Research



Manufacturing



Maintenance



Service



WORLDWIDE BRANCHES

USA

Saikang Medical Technology, Inc.
17800 Castleton St Ste 180,
City of Industry, 91748, California.
Tel.: +1 949648 2776

United Kingdom

UK Healthward International Ltd.
Dept. 111, 196 High Road Wood
Green, N22 8HH, London.
Tel.: +44 2032399738

Russia

Saikang Medical Russia LLC
Truda 174,
454080 Chelyabinsk.
Tel.: +7 (351) 214 5566 / 8811 / 1516

East Africa

Saikang Medical Solutions Ltd.
Viraj Complex Unit 3, Mombasa
Road, P.O. Box 14262-00800, Nairobi.
Kenya.
Tel.: +254 733 704 690

Middle East

Saikang Medical Supplies LLC
X22-S03 England Cluster,
International City, Dubai.
United Arab Emirates.
Tel.: +20 128 8962497

SKSurgitech™
by Saikang Medical

Jiangsu Saikang Medical Equipment Co., Ltd.
STOCK CODE: 870098

📍 No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China
☎️ +86 18021231901 · 🕒 24/7
✉️ export@sksurgitech.com
🌐 www.sksurgitech.com



Company video



General catalogue